


UHF RFID Tag

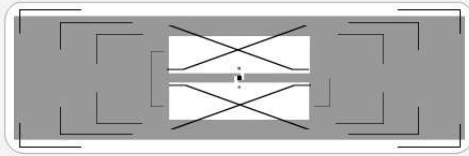

DS-PT19

Application:

- Vehicle Tracking
- Asset Tracking
- Workforce Management
- Manufacturing
- And many more

Type	Destructible Non-Metal UHF RFID Label Tag
Model No.	DS-PT19
Read Range	up to 10m
Protocol	ISO/IEC 18000-6C & EPCglobal Class 1 Gen 2
Printing	Customized Printing available
Operating Temperature	-20°C-60°C
Operating Humidity	30%-70%
Storage Temperature	-20°C-60°C
Frequency	860-960 MHz (Global)
EPC	256 Bits
User Memory	512 Bits
Data Retention	10 years
Unique TID	112 Bits
Access Password	32 Bits
Kill Password	32 Bits
ESD	≤2KV
Integrated Circuit	H3 or Customized
Antenna Size	96×26mm/3.78×1.02 in
Die-cut Size	100×32mm/3.94×1.26 in
Antenna substrate material	Aluminum
Surface material	Synthetic paper
Liner material	PET
Standard pitch	41.91mm/1.65in
Standard web widths	120mm/4.72in
Expected read cycles	100,000 cycles