




Dominate Smart Site

Transforming the way industries work

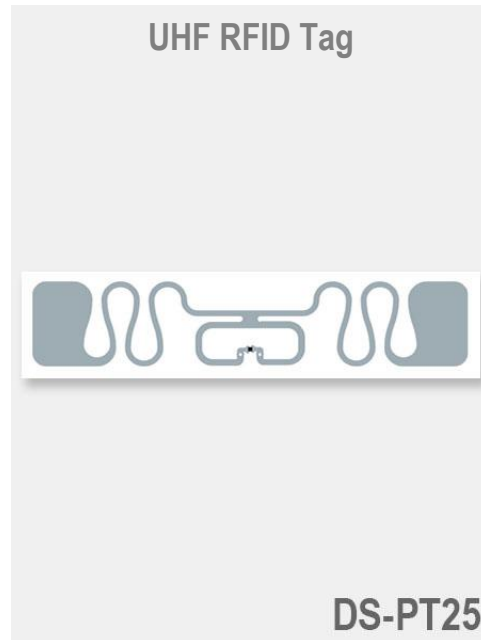

Application:

- Asset Tracking
- Workforce Management
- Manufacturing
- And many more

Type	Non-Metal UHF RFID Label Tag
Model No.	DS-PT25
Read Range	Up to 3 m
Protocol	EPCglobal UHF Class 1 Gen 2 (ISO 18000-6C)
Frequency Range	860-960 MHz (Global)
Dimensions	70 x 14.5 mm
Operating Temperature	-40 to 185F (-40 to 85C)
IC Type	Impinj Monza R6
EPC	96 bits
TID Memory	48-bit unique serialized TID Number
Material Compatibility	Non-metal surfaces.
Attachment	Acrylic, adhesive